



LOW FREQ (2 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	9090	9090
2	2	3	8060	8060
3	3	4	6490	6490
4	4	5	6490	6490
5	5	6	4320	4320
6	6	7	4120	4120
7	7	8	3480	3480
8	8	9	2610	2610
9	9	10	2320	2320
10	10	11	1800	1800
11	11	12	1910	1910
12	12	13	1240	1240
13	13	14	1150	1150
14	14	15	845	845
15	15	16	750	750
16	16	17	715	715
17	17	18	576	576
18	18	19	430	430
19	19	20	374	374
20	20	21	316	316

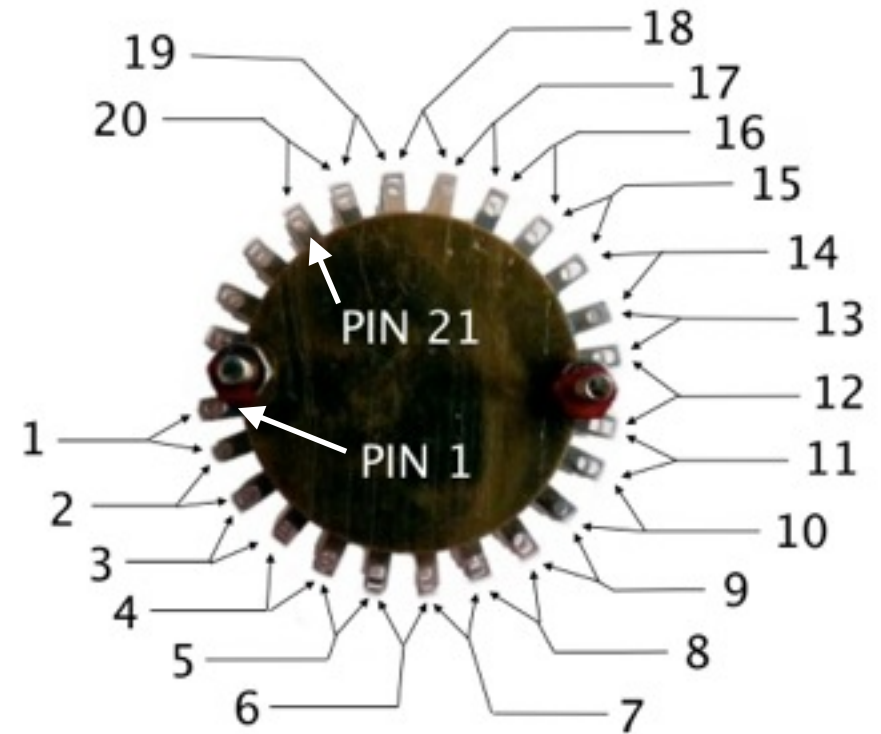


MID FREQ 1 (2 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	13000	13000
2	2	3	14700	14700
3	3	4	13000	13000
4	4	5	8450	8450
5	5	6	8250	8250
6	6	7	6800	6800
7	7	8	5900	5900
8	8	9	4420	4420
9	9	10	4220	4220
10	10	11	3400	3400
11	11	12	2700	2700
12	12	13	2260	2260
13	13	14	1820	1820
14	14	15	1820	1820
15	15	16	1270	1270
16	16	17	1180	1180
17	17	18	820	820
18	18	19	732	732
19	19	20	732	732
20	20	21	549	549

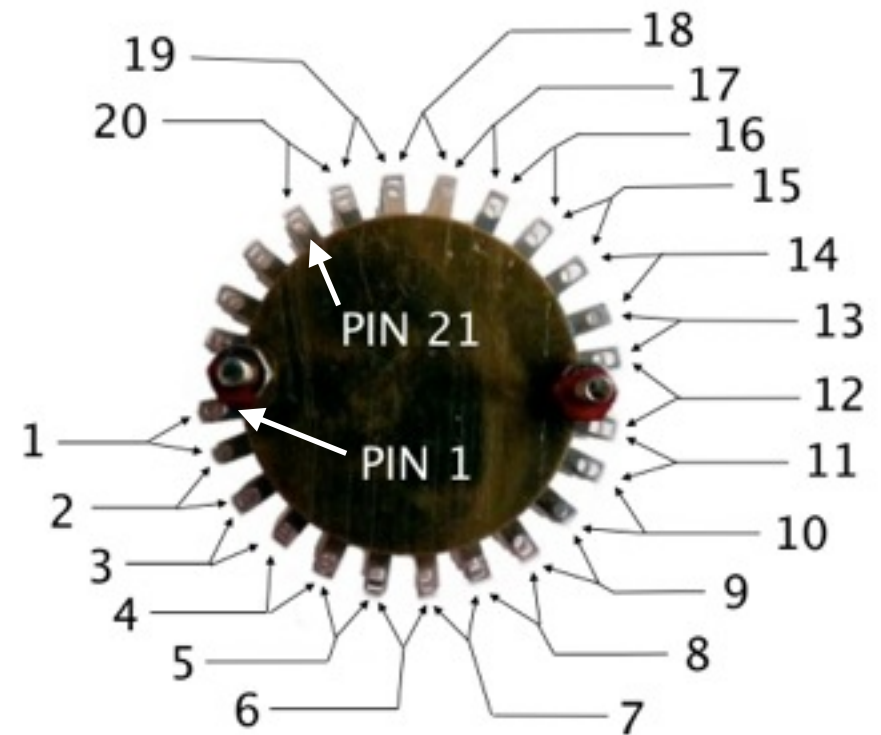


MID FREQ 2 (2 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	8660	8660
2	2	3	8060	8060
3	3	4	6650	6650
4	4	5	6200	6200
5	5	6	4420	4420
6	6	7	4120	4120
7	7	8	3400	3400
8	8	9	2700	2700
9	9	10	2260	2260
10	10	11	1800	1800
11	11	12	1800	1800
12	12	13	1300	1300
13	13	14	1180	1180
14	14	15	820	820
15	15	16	732	732
16	16	17	732	732
17	17	18	560	560
18	18	19	430	430
19	19	20	365	365
20	20	21	316	316

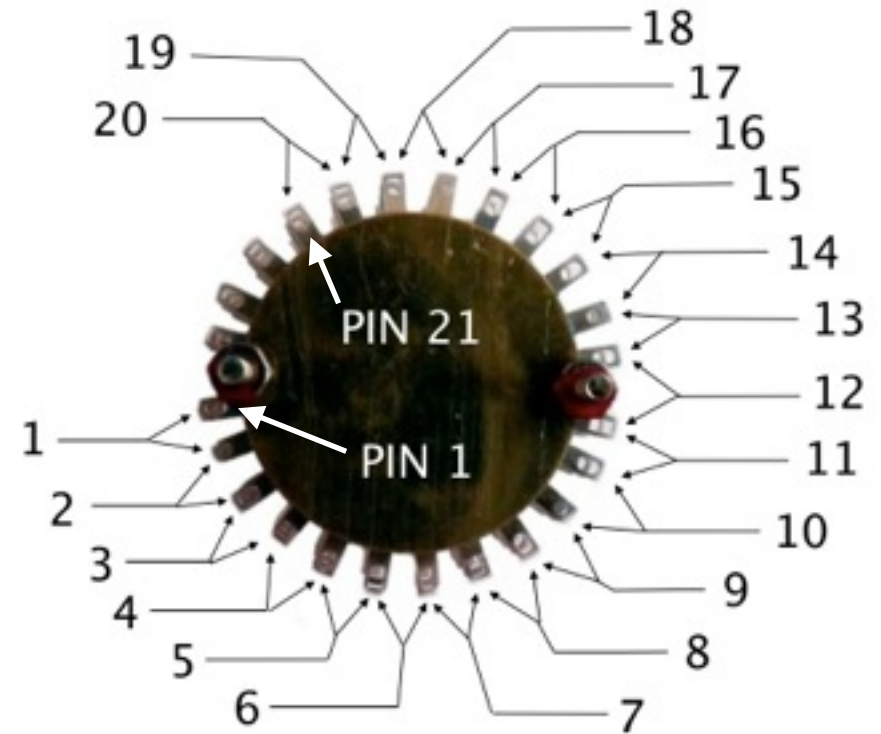


MID FREQ 3 (2 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	14700	14700
2	2	3	13000	13000
3	3	4	9090	9090
4	4	5	7870	7870
5	5	6	6800	6800
6	6	7	4990	4990
7	7	8	5230	5230
8	8	9	4530	4530
9	9	10	3160	3160
10	10	11	2740	2740
11	11	12	1960	1960
12	12	13	1960	1960
13	13	14	1740	1740
14	14	15	1300	1300
15	15	16	1200	1200
16	16	17	820	820
17	17	18	619	619
18	18	19	931	931
19	19	20	430	430
20	20	21	464	464

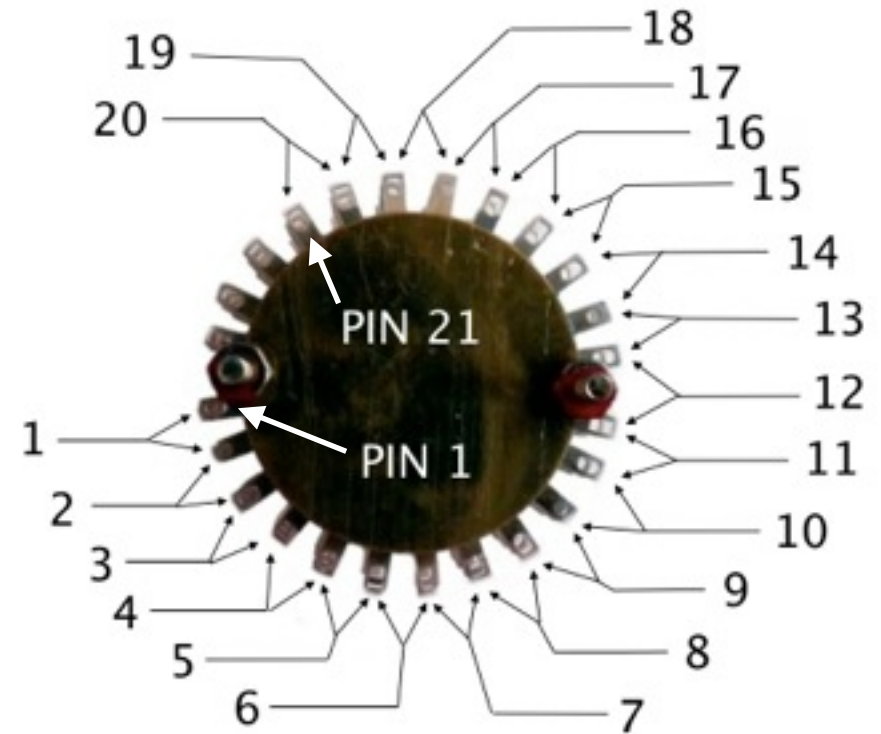


HI FREQ (2 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	11800	11800
2	2	3	4320	4320
3	3	4	7150	7150
4	4	5	7500	7500
5	5	6	5230	5230
6	6	7	3830	3830
7	7	8	3830	3830
8	8	9	2800	2800
9	9	10	2700	2700
10	10	11	2320	2320
11	11	12	1960	1960
12	12	13	1740	1740
13	13	14	1540	1540
14	14	15	1240	1240
15	15	16	1100	1100
16	16	17	910	910
17	17	18	820	820
18	18	19	680	680
19	19	20	560	560
20	20	21	510	510

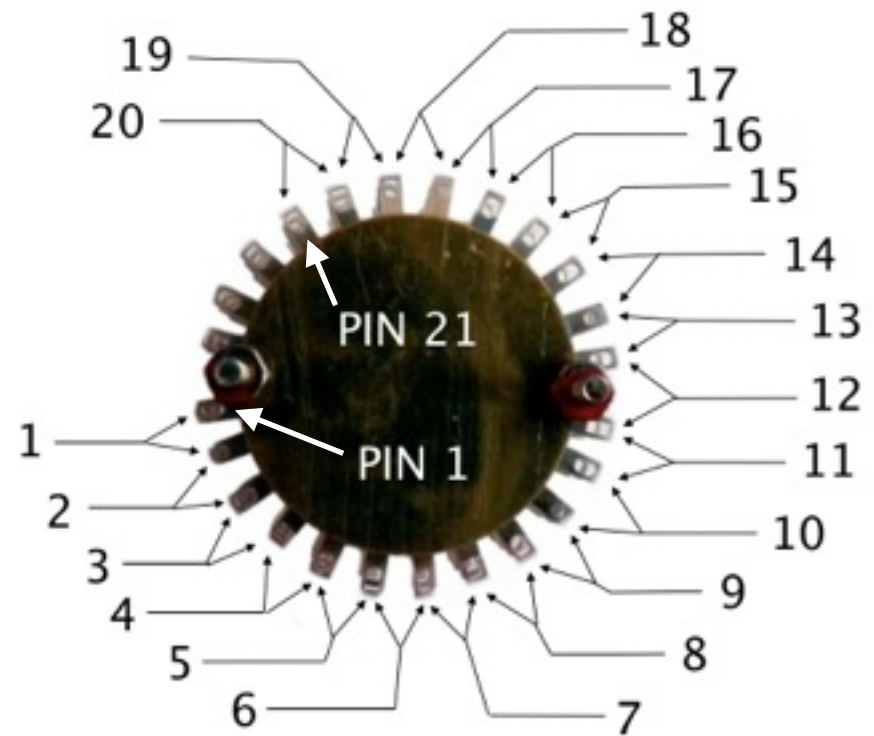

GAIN SWITCH (1 POLE, 21 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE
1	1	2	2000
2	2	3	2000
3	3	4	2700
4	4	5	3400
5	5	6	3090
6	6	7	3300
7	7	8	2870
8	8	9	2430
9	9	10	1780
10	10	11	1400
11	11	12	1400
12	12	13	1780
13	13	14	2430
14	14	15	2870
15	15	16	3300
16	16	17	3090
17	17	18	3400
18	18	19	2700
19	19	20	2000
20	20	21	2000

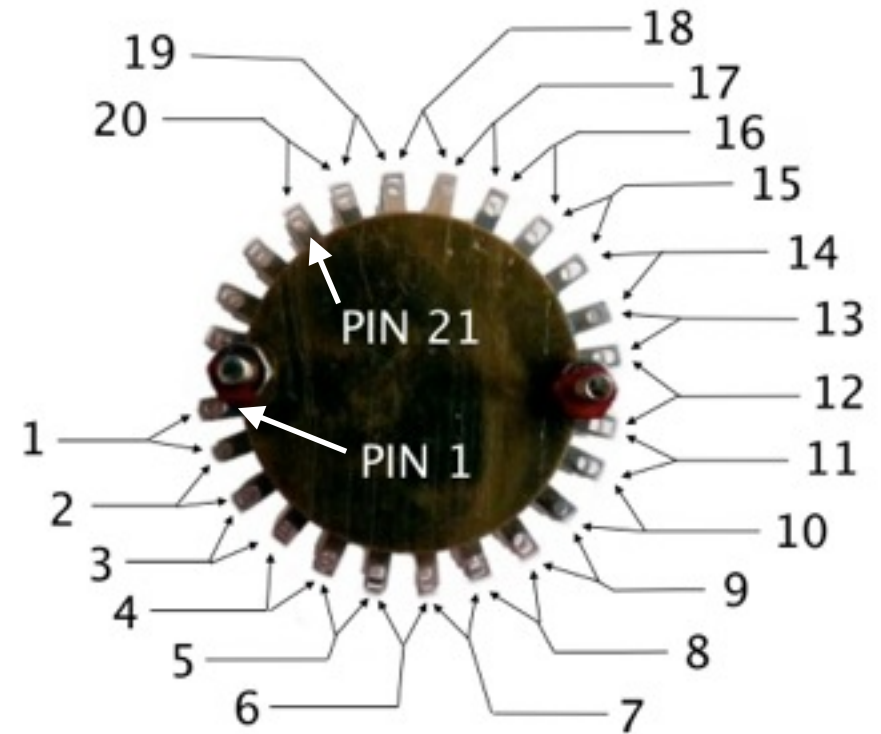

MID1, MID2, MID3, HF SHAPE SWITCH (1 POLE, 11 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE
1	1	2	499
2	2	3	499
3	3	4	499
4	4	5	499
5	5	6	499
6	6	7	499
7	7	8	499
8	8	9	499
9	9	10	499
10	10	11	499

LF SHAPE SWITCH (2 POLE, 12 STEP)

RESISTOR #	FROM PIN	TO PIN	1 POLE	2 POLE
1	1	2	0(Jumper)	NOT CONNECT
2	2	3	499	0(Jumper)
3	3	4	499	0(Jumper)
4	4	5	499	0(Jumper)
5	5	6	499	0(Jumper)
6	6	7	499	0(Jumper)
7	7	8	499	0(Jumper)
8	8	9	499	0(Jumper)
9	9	10	499	0(Jumper)
10	10	11	499	0(Jumper)
11	11	12	499	0(Jumper)